



Samsung Galaxy Light Earpiece Speaker Replacement

Replace the earpiece speaker.


Written By: Paul Goyette




INTRODUCTION

Use this guide to replace the earpiece speaker.

Step 1 — Removing back cover

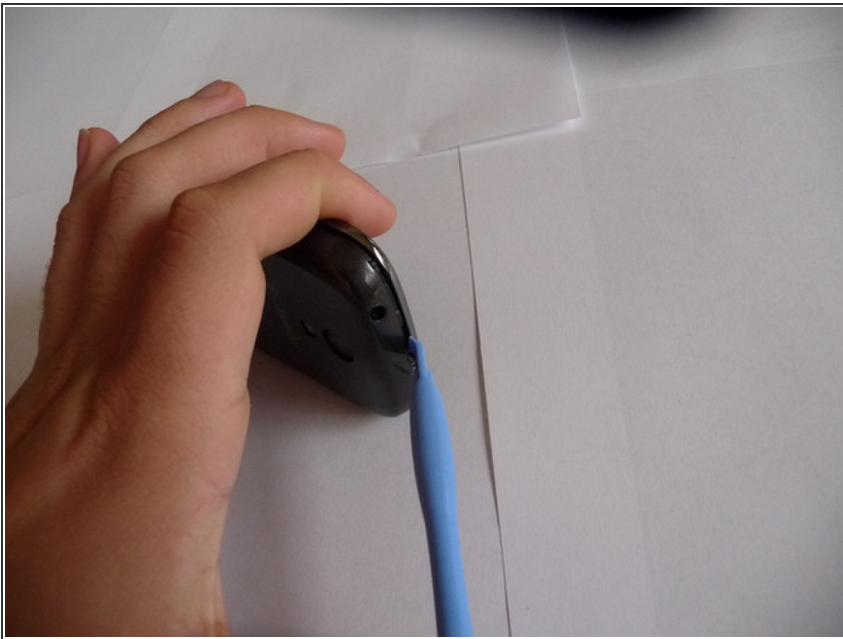

 Before removing the back cover, make sure the Samsung Galaxy Light is switched off.

- Using a plastic opening tool, lift up the back cover of the device.
- Remove the back cover.

Step 2 — Lifting battery out



- Using your finger, remove the battery from the device.

Step 3 — Unscrew motherboard from plastic protection



- Using a Phillips #0 screwdriver, remove 9 screws.

Step 4 — Removing the cover




- Using the plastic opening tool, separate the midframe from the front panel of the device.
- Remove the midframe.

Step 5 — Detach motherboard



- To detach the motherboard from the device:
 - Using the plastic opening tool, remove the connector from the motherboard.
 - Carefully lift the motherboard up and move it toward the left side of the device.
 - Using the plastic opening tool, remove the connector on the back side of the motherboard.

Step 6 — Removing the audio and vibrator

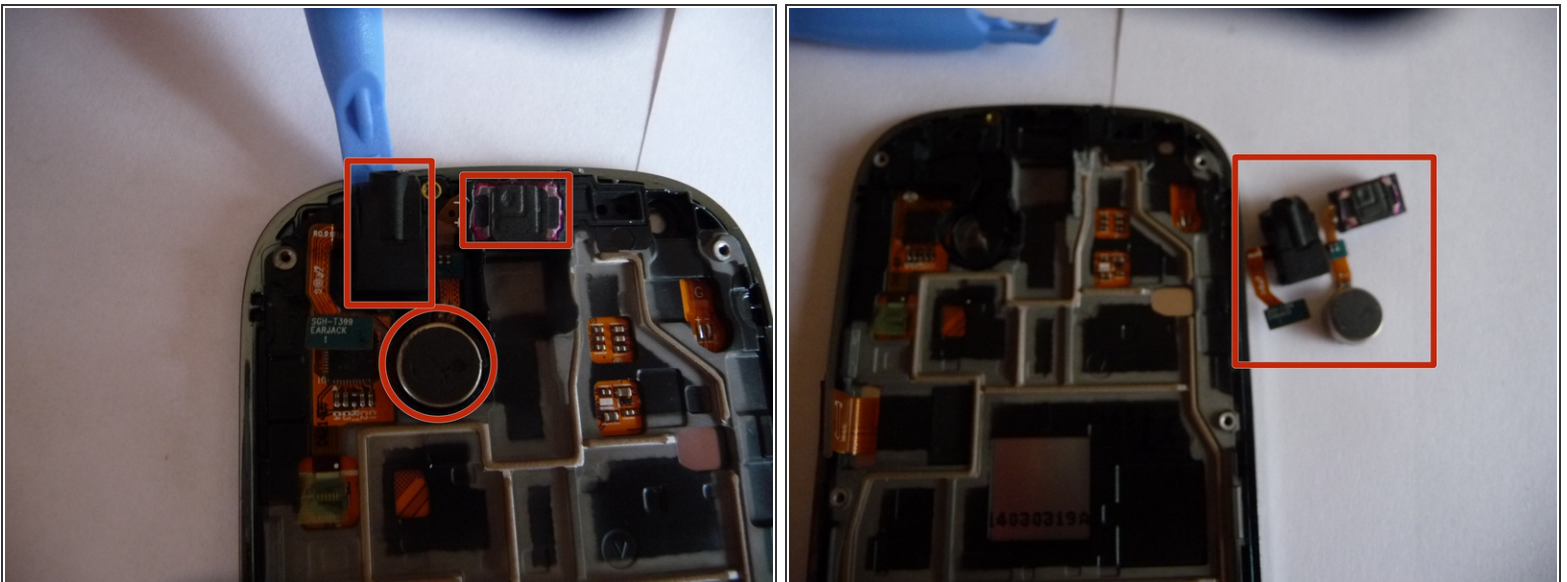

- Use a plastic opening tool to pry up the headphone jack, vibrator, and earpiece speaker assembly.

To reassemble your device, follow these instructions in reverse order.

